

VelociWash - Tote Cleaning System

	Wall-Mounted Pressure Washer
Model	
	X-2775FW3GENHT4 (3000 PSI, 4.0 GPM, General Triplex Pump)
Туре	
	7.5 HP Electric Pressure Washer (7.5 HP, 3-Phase Baldor Motor)
Pressure	
	3000 PSI (Maximum Output)
Water Temperature	
	Capable of operating with warm to hot water
Electrical Requirements	
Voltage	208V (Plug-in option)
Alternative Option	Permanently wired into a disconnect (if requested by site)
Water Source	
	Must be provided in the room; can be hot or cold, but hot is recommended
Tote Tipper	
Function	
	Turns totes upside down to allow for thorough jet cleaning inside the bins
Mounting	
	Positioned within the berm to maintain stability during operation
Movement	
	Powered mechanism for controlled tipping of totes
Berm	
Material	
	Durable, high-quality stainless steel
Dimensions	
	1365.25 mm (53.75 in) W x 1678.99 mm (66.0625 in) D x 1352.55 mm (53.25 in) H Sized to fit the tote tipper unit securely Customization available upon request
Mounting	
	Fixed station sealed to a floor drain
Drainage	
	Water accumulated within the berm drains directly into the floor drain provided by the property



Installation Details

Wall-Mounted Pressure Washer

- · Mounted securely to a suitable wall or surface, ensuring accessibility and safe positioning
- Connection of the pressure washer to the existing hot or cold water supply

Berm and Tipper

- The berm is secured to the floor and sealed to prevent leaks
- The tote tipper sits securely inside the berm, allowing precise tipping and cleaning of bins

Recommended Operation

Water Temperature

Warm to hot water recommended for effective degreasing and cleaning of tote bins

Pressure Setting

The pressure washer should operate at 3000 PSI for optimal tote cleaning, with the internal jet ensuring thorough cleaning

Pressure Washer




Contact Us info@terraformasystems.com

Visit Our Website terraformasystems.com

Tote Washer



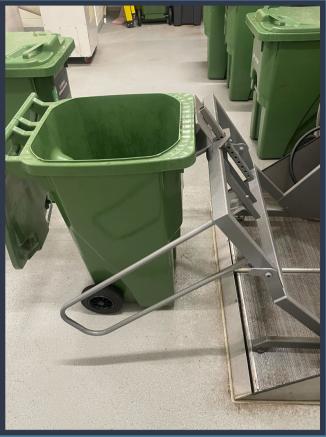





Tote Washer Diagram



